

**Bacteriological
Water Quality
of
Round Lake,
Belmont Township
1975**

MOE
BEL
BAC
ANKB

c.1
a aa



Ontario

**Ministry
of the
Environment**

The Honourable
George A. Kerr, Q.C.,
Minister

Everett Biggs,
Deputy Minister

Copyright Provisions and Restrictions on Copying:

This Ontario Ministry of the Environment work is protected by Crown copyright (unless otherwise indicated), which is held by the Queen's Printer for Ontario. It may be reproduced for non-commercial purposes if credit is given and Crown copyright is acknowledged.

It may not be reproduced, in all or in part, for any commercial purpose except under a licence from the Queen's Printer for Ontario.

For information on reproducing Government of Ontario works, please contact ServiceOntario Publications at copyright@ontario.ca

**Bacteriological Water Quality
of Round Lake, Belmont Township**

1975

by

George S. Hendry

and

Patricia Bolton

**Microbiology Section
Laboratory Services Branch
MINISTRY OF THE ENVIRONMENT**

ankb

ROUND LAKE

INTRODUCTION

The Recreational Lakes Self-Help program was established by the Ontario Water Resources Commission with interested cottager associations in 1971, and continued by the Ministry of the Environment since then to assist cottage owners to determine the bacteriological water quality of their lake. The Self-Help investigations can be useful in indicating possible contamination sources which require later M.O.E. surveys, or in assuring interested cottagers that the bacteria present are from natural sources without health hazards. The M.O.E. bacteriological survey is of special importance for typing and pinpointing bacterial pollution sources.

The success of this program depended on the enthusiastic support of the cottagers association, and especially Mr. G. Jeffrey who took the samples and delivered them to the Ministry of the Environment Toronto Laboratory for analysis.

Bacteriological Methods and Interpretation

Samples of lakewater were taken by recommended procedures (see Appendix A-5) regularly in June, July and August of 1975 at 18 selected sampling locations (see map).

The number of bacteria in each of the four kinds of 'indicator' organisms were determined on each sample. The four kinds of bacteria, total coliform, fecal coliform, fecal streptococcus bacteria, and Pseudomonas aeruginosa are all indigenous to man and other warm-blooded animals, and are found in the colon and feces in tremendous numbers. Many diseases common to man can be transmitted by feces; consequently, the probability of occurrence of these diseases is highest in areas where water is contaminated with fecal material. These indicator organisms in water connote the possible presence of disease causing organisms.

The geometric mean (1), the most appropriate representative value of the data for each station, was calculated with respect to the Ministry of the Environment Recreational Criteria (1), which states:

"Where ingestion is probable, recreational waters can be considered impaired when the coliforms (TC), fecal coliform (FC), and/or enterococcus (fecal streptococcus, FS) geometric mean density exceeds 1000, 100 and/or 20 per 100 ml respectively, in a series of at least ten samples per month ... (1).

A proper estimate of the bacterial population requires several measurements of bacterial density over a period of time which can then be averaged as a geometric mean. Therefore, the sampling frequency in the Recreational Criteria is most important, and is usually achieved only with the M.O.E. and not the Self-Help surveys. The Self-Help program gives a good estimate of the bacteriological water quality of the lake. Single unconfirmed high values may indicate intermittent pollution, but must be interpreted cautiously.

The most important of the bacterial indicators of water quality is the fecal coliform density. The bacteria are largely Escherichia coli, an inhabitant of the intestines of man and animals. High levels of fecal coliforms without a corresponding level of fecal streptococcus may indicate some human contamination and an accompanying health hazard to users of the water.

(1) Guidelines and Criteria for Water Quality Management in Ontario M.O.E. 1974.

Microbial contamination by raw or inadequately treated sewage does not significantly change the appearance of the water but poses an immediate public health hazard when the water is used for drinking or swimming. This type of pollution can be remedied by preventing wastes from reaching a lake. If this is the only source of pollution, satisfactory water quality will then return since disease causing bacteria do not usually persist in lake water.

Results and Discussion

The self-help sampling program showed that the bacteriological water quality of Round Lake in 1975 was good, with some exceptions. The overall geometric mean densities for the lake throughout the summer were 17 TC, 4 FC and 3 FS per 100 ml.

In July, the geometric mean bacterial densities for the lake were 22 TC, 3 FC and 6 FS per 100 ml. The pathogenic bacterium Pseudomonas aeruginosa was not isolated.

The August data was subjected to additional statistical testing. The geometric mean densities for each station were calculated and statistically significant variations in the bacterial densities between stations were determined by an Analysis of Variance and Bartlett's Test of Homogeneity. By these means, the data from each station was tested against that of every other station until all stations with similar geometric mean densities were separated into groups or individual stations. These tests showed that the mean bacterial densities, in August, for the main body of water were 10 TC, 3 FC and 2 FS per 100 ml (Group A, Figure 2). Three locations were found where levels of some bacterial parameters were greater than those of the main body of water. The public access (Stn. 8) had counts of 39 TC and 15 FS per 100 ml. The sampling location at the fishing camp on the west shore (Stn. 13) had a total coliform count of 45 TC per 100 ml and the inflow at the North River (Stn. 14) was recorded to have a level of 12 FC per 100 ml.

There appeared to be inputs of bacteria at two locations where the mean values of all parameters were greater than those of the main body of water. The south inflow (Stn. 9) had levels of 60 TC, 27 FC and 11 FS per 100 ml. Higher bacterial levels have often been observed in inflowing streams as they may carry various materials such as soil, decaying matter and possibly animal and human

wastes into the lake. Another possible source of bacteria was located near the trailer camp on the north shore (Stn. 16) where the bacterial counts were 146 TC, 48 FC and 16 FS per 100 ml. The FC/FS ratio at this location was 3.0 suggesting that some human contamination might be present.

Pseudomonas aeruginosa was isolated at three locations on August 17. However, the appearance of this organism on only one day throughout the summer indicated that its mean density was very low.

The water quality of Round Lake was generally acceptable for recreational use. No surface water is considered potable, however, without prior treatment including disinfection (see Appendix A-3).

ROUND LAKE 1975

Monthly Geometric Mean Bacterial Densities per 100 ml

STATION NUMBER	TC/100 ml			FC/100 ml			FS/100 ml		
	July	August	Sept. 1	July	August	Sept. 1	July	August	Sept. 1
1	14.4	15.5	8	1.4	1	4	5.0	1.9	1
2	11.8	7.2	16	1.9	1.4	4	2.4	1.0	4
3	64.8	25.2	20	6.7	2.6	8	4.1	1.4	1
4	9.8	8.5	24	2.4	3.1	12	2.6	1.4	1
5	10.3	7.7	8	3.0	1.0	4	12.6	2.6	1
6	5.0	17.5	8	1.0	1.0	1	2.4	4.0	1
7	50.3	26.0	1	5.2	2.8	4	8.3	4.8	1
8	33.5	38.7	24	1.0	3.2	1	6.3	15.4	8
9	169.6	59.8	470	35.7	26.7	180	25.6	10.5	12
10	9.5	1.4	1	1.4	1.0	1	2.4	1.4	1
11	67.7	23.0	140	7.7	2.3	80	16.2	1.9	1
12	6.7	4.4	1	1.4	1.4	4	3.4	2.8	1
13	29.1	45.2	24	2.6	8.5	8	13.9	7.0	1
14	31.1	22.0	36	2.0	11.5	52	3.7	1.0	1
15	60.5	24.1	24	13.2	10.1	20	11.6	4.0	4
16	36.7	146.2	40	3.0	48.4	12	12.5	16.3	8
17	8.8	11.0	68	2.0	6.0	12	6.3	1.9	8
18	10.0	2.5	1	1.0	1.0	1	1.0	1.4	1
MONTHLY MEAN	22	15	14	3	3	7	6	3	2
OVERALL MEAN		17			4			3	

FIGURE 1 - LOCATION OF SAMPLING STATIONS FOR ROUND LAKE


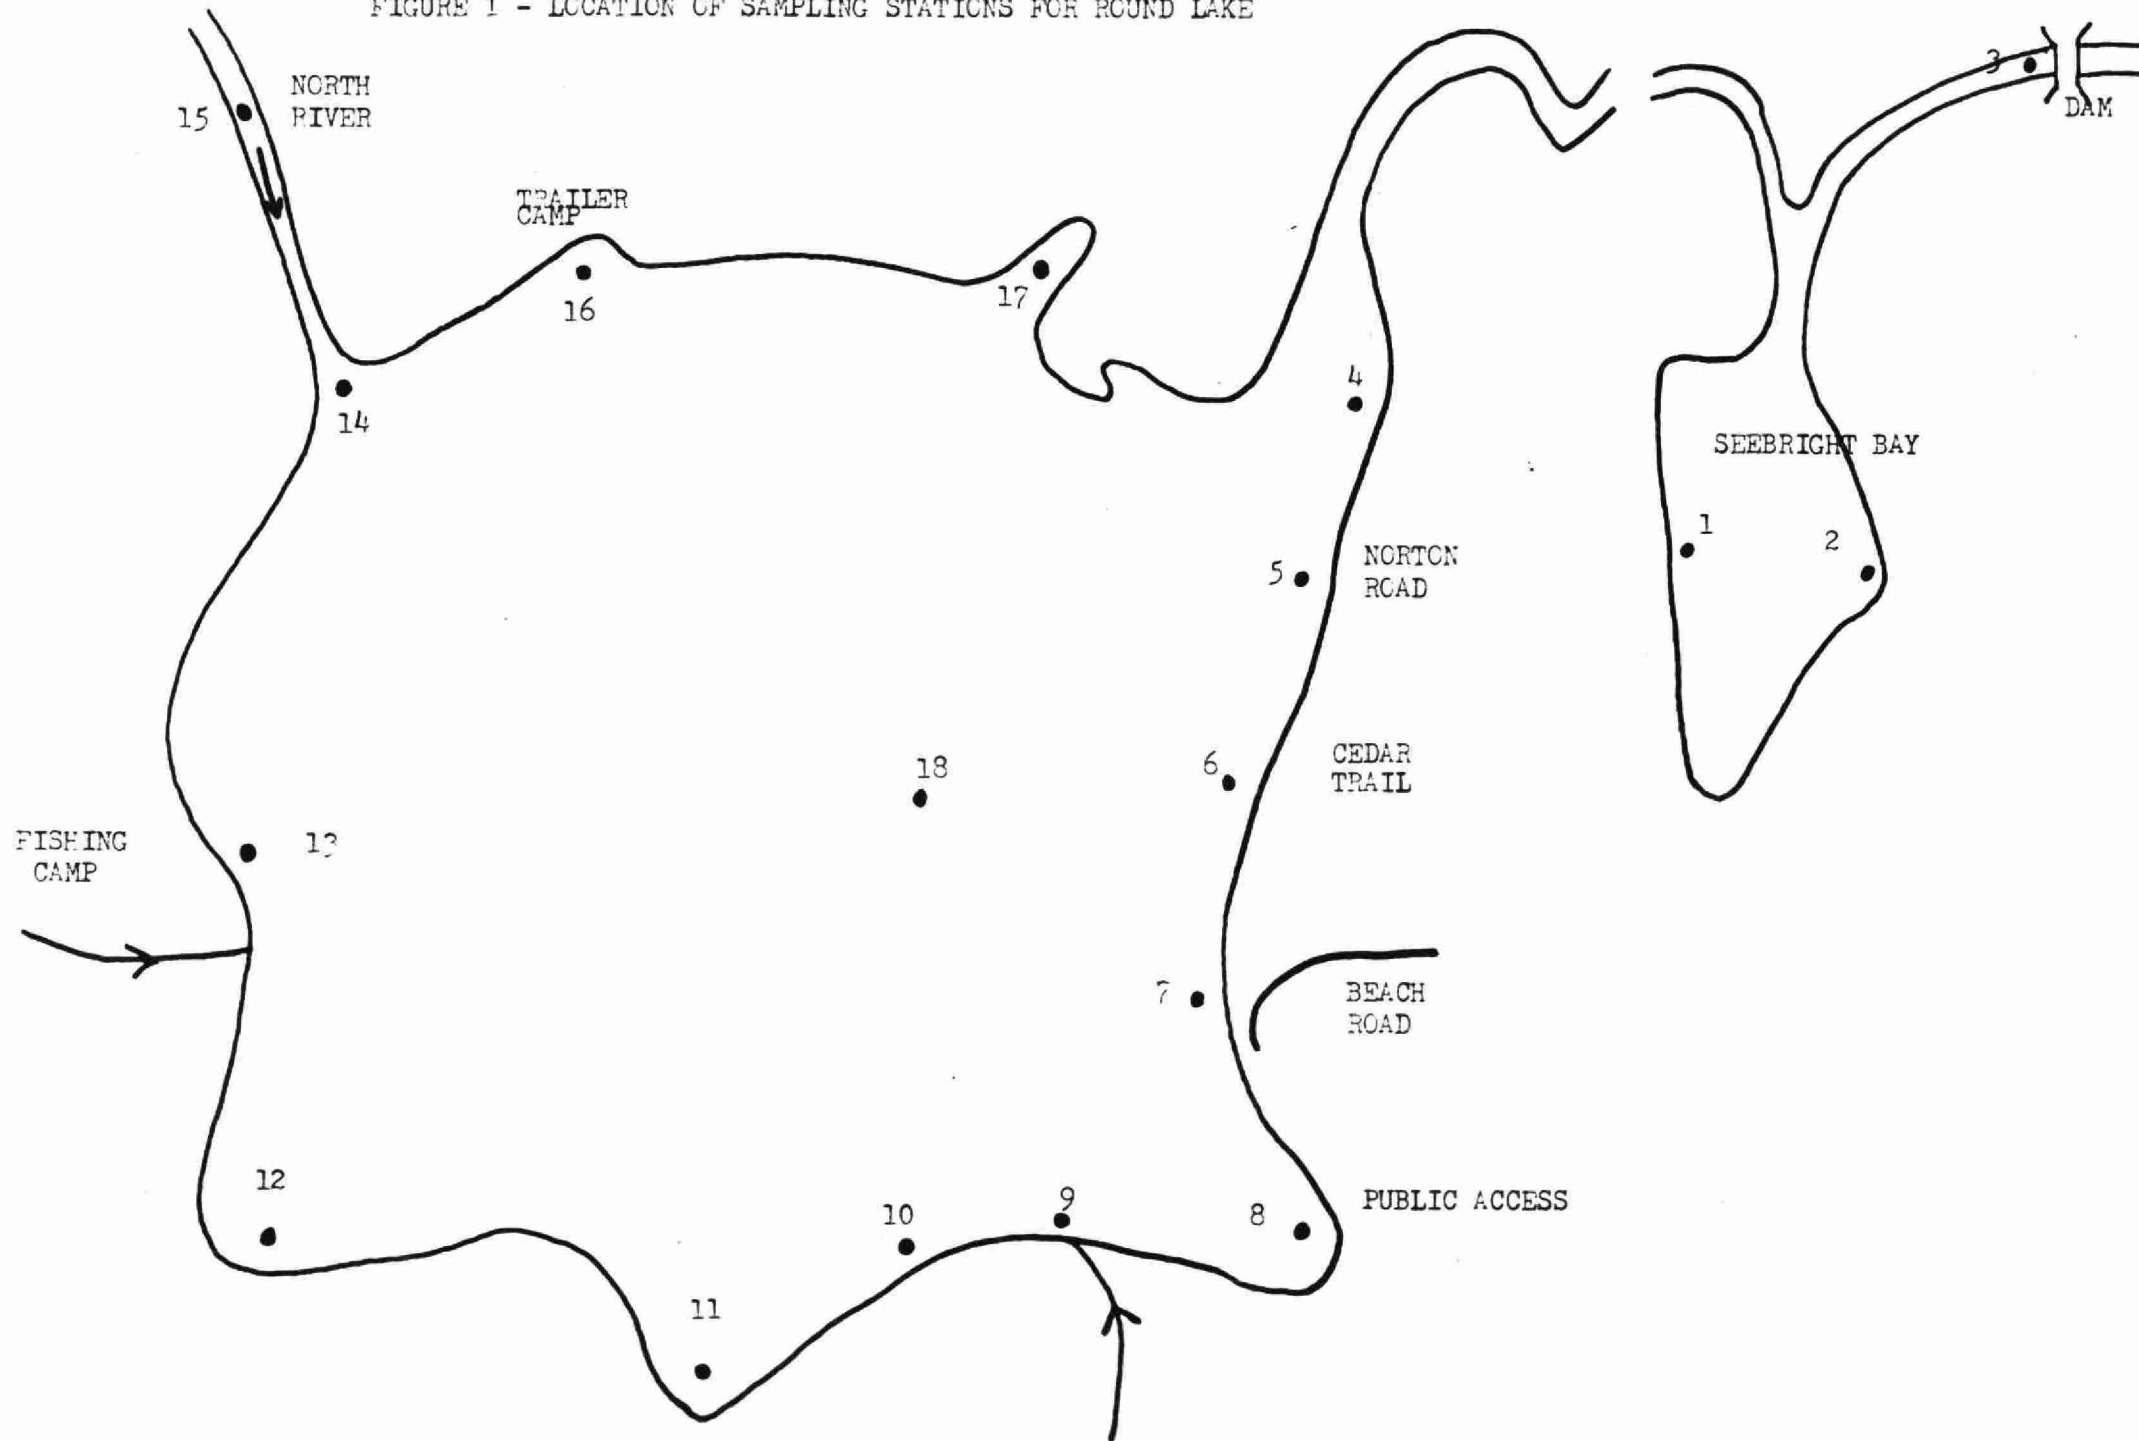


FIGURE 2 - DISTRIBUTION OF BACTERIA IN AUGUST

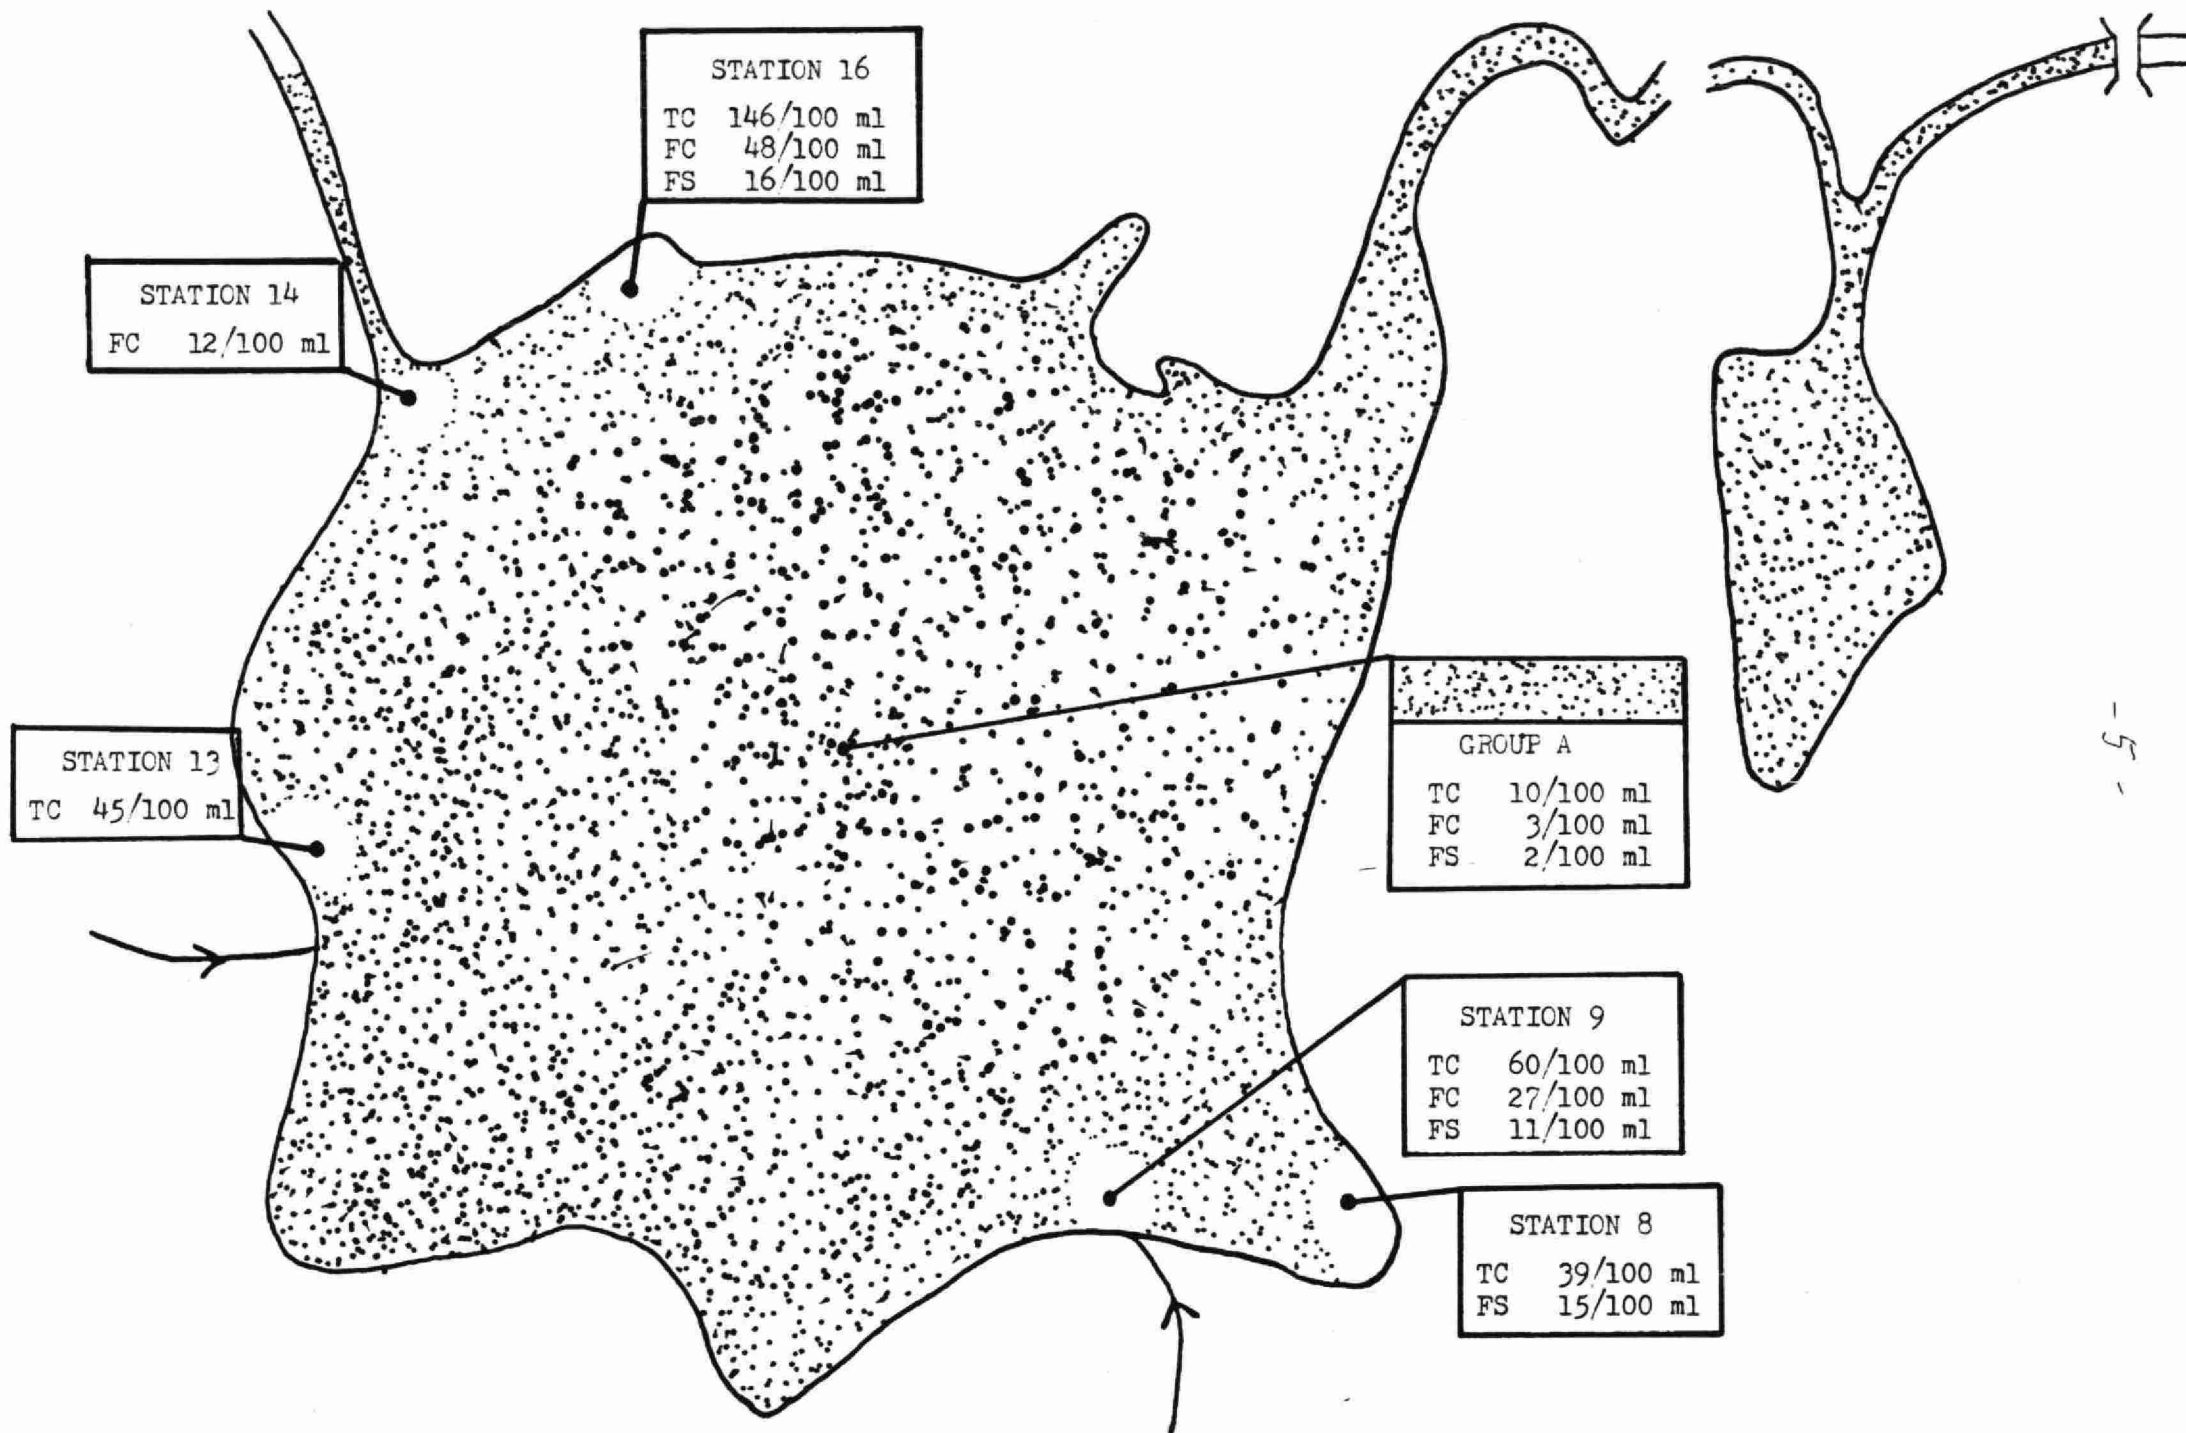

APPENDIXINFORMATION OF GENERAL INTEREST TO COTTAGERS
MICROBIOLOGY OF WATER

For the sake of simplicity, the microorganisms in water can be divided into two groups: the bacteria that thrive in the lake environment and make up the natural bacterial flora; and the disease causing microorganisms, called pathogens, that have acquired the capacity to infect human tissues.

The "pathogens" are generally introduced to the aquatic environment by raw or inadequately treated sewage, although a few are found naturally in the soil. The presence of these bacteria does not change the appearance of the water but poses an immediate public health hazard if the water is used for drinking or swimming. The health hazard does not necessarily mean that the water user will contract serious waterborn infections such as typhoid fever, polio or hepatitis, but he may catch less infections of gastroenteritis (sometimes called stomach flu), dysentery or diarrhea. Included in these minor afflictions are eye, ear and throat infections that swimmers encounter every year and the more insidious but seldom diagnosed, sub-clinical infections usually associated with several water born viruses. These viral infections leave a person feeling not well enough to enjoy holidaying although not bedridden. This type of microbial pollution can be remedied by preventing wastes from reaching the lake and subsequently water quality will return to satisfactory conditions within a relatively short time (approximately one year) since disease causing bacteria do not usually thrive in an aquatic environment.

The other bacteria live and thrive within the lake environment. These organisms are the instruments of biodegradation. All organic matter in the lake will be used as food by these organisms and will give rise, in turn to subsequent increases in their numbers. Organic matter from natural sources as well as that from sewage, kitchen wastes, oil and gasoline are readily attached by these lake bacteria. Unfortunately, biodegradation of large

quantities of organic wastes by organisms uses correspondingly large amounts of dissolved oxygen. If the organic matter content of the lake is high enough, these bacteria will deplete the dissolved oxygen supply in the bottom waters and so threaten the survival of many deep water fish species.

RAINFALL AND BACTERIA

The "Rainfall Effect" has been documented in previous surveys of Recreational Lakes. Heavy precipitation has been shown to flush the land area around the lake and the subsequent runoff will carry available contaminants including sewage organisms as well as natural soil bacteria with it into the water.

Total coliforms, fecal coliforms and fecal streptococci, as well as other bacteria and viruses which are found in human waste disposal systems, can be washed into the lake. This phenomenon is particularly evident in Precambrian areas where there is inadequate soil cover and in fractured limestone areas where fissures in the rocks provide access to the lake.

Melted snow provides the same transportation function for bacteria, especially in an agricultural area in winter where manure spreading is carried out on top of the snow.

Previous data from sampling points situated 50 to 100 feet from shore indicate that contamination from shore generally shows up within 12 to 48 hours after a heavy rainfall.

WATER TREATMENT

Lake and river water is open to contamination by man, animals and birds (all of which can be carriers of disease); consequently, NO SURFACE WATER MAY BE CONSIDERED SAFE FOR HUMAN CONSUMPTION without prior treatment, including disinfection. Disinfection is especially critical if coliforms have been shown to be present.

Disinfection can be achieved by:

- (a) Boiling:
Boil the water for a minimum of five minutes to destroy the disease causing organisms.
- (b) Chlorination Using a Household Bleach Containing 4 to 5.1/4% Available Chlorine:
Eight drops of a household bleach solution should be mixed with one gallon of water and allowed to stand for 15 minutes before drinking.
- (c) Continuous Chlorination:
For continuous water disinfection, a small domestic hypochlorinator (sometimes coupled with activated charcoal filters) can be obtained from a local plumber or water equipment supplier.
- (d) Well Water Treatment:
Well water can be disinfected using a household bleach (assuming strength at 5% available chlorine) if the depth of water and diameter of the well are known.

CHLORINE BLEACH
per 10 ft depth of water

Diameter of Well Casing in Inches	One to Ten Coliforms	More than Ten Coliforms
4	.5 oz.	1 oz.
6	1 oz.	2 oz.
8	2 oz.	4 oz.
12	4 oz.	8 oz.
16	7 oz.	14 oz.
20	11 oz.	22 oz.
24	16 oz.	31 oz.
30	25 oz.	49 oz.
36	35 oz.	70 oz.

Allow about six hours of contact time before using the water.

Another bacteriological sample should be taken after one week of use.

Water Sources (spring, lake, well, etc.) should be inspected for possible contamination routes (surface soil, runoff following rain and seepage from domestic waste disposal sites). Attempts at disinfecting the water alone without removing the source of contamination will not supply bacteriologically safe water on a continuing basis.

There are several types of low cost filters (ceramic, paper, carbon, diatomaceous earth sometimes impregnated with silver, etc.) that can be easily installed on taps or in water lines. These may be useful to remove particles if water is periodically turbid and are usually very successful. Filters, however, do not disinfect water but may reduce bacterial numbers. For safety, chlorination of filtered water is recommended.

SAMPLE-TAKING PROCEDURE

A maximum of 24 hours is permitted between time of sample collection and examination. The sampling bottle shall be kept unopened until the moment it is to be filled. After the bottle is screwed into place on the sample rod, the plastic covering is peeled off; the cap then is removed from the bottle using sterile technique. During sampling the cap and neck of the bottle should not be handled and should be protected from contamination. The bottle is then inverted and plunged into the water to a depth of about three feet. Enough air space should be left in the bottle to facilitate mixing of the sample by shaking before examination. Excess is poured off. The sample should be stored in an ice cooler immediately.

If the sample is being taken from a tap, the tap should be opened fully and the water allowed to run to waste for two or three minutes first. The flow from the tap should be restricted to one that will fill the bottle without splashing.

In collecting samples directly from a river, stream, lake, reservoir, spring or shallow well, the aim must be to obtain a sample that is representative of the water. From lakes, it is desirable to take samples 15 to 20 feet from shore and at a depth of three feet (1 meter) wherever

possible. In shallower water, sample at the mid depth.
At the mouth of a stream, sample at the mid point of a
line continuing the lake shore.



(9154)

MOE/BEL/BAC/ANKB

DATE DUE			

MOE/BEL/BAC/ANKB

Hendry, G S

Bacteriological

water quality of Round ankb

Lake, Belmont c.1 a aa

Township 1975